

[Features]

- PTFE material can be used in strong acid and alkali environment.
- RS-485 communication, no signal attenuation.
- It can measure liquid level of various chemicals.

[Applications] Sea water, chemical liquid

[Optional Code]

PPL-485

—

Code 1

—

Code 2




Code 1 / Range meter						Code 2	Line length
3	5	10	20	30	50	N	Standard line length 20 meters
※ The standard product has a range of 10 meters and a line length of 20 meters						Customized (value is code)	Customize the length of the outlet according to the value

[Specifications]

Power	12 ~ 30 VDC
Power consumption	0.1W
Range	0 ~ 50 m(Depends on code 1 option)
Accuracy	±5% F.S
Output signal	RS-485
Body material	PTFE
Sensing diameter	30mm
Overvoltage tolerance	1.5 times the range
Operating temperature	0 ~ 45°C
Degree of protection	IP68
Measurement principle	Pressure conversion head height

[Dimension] (mm)

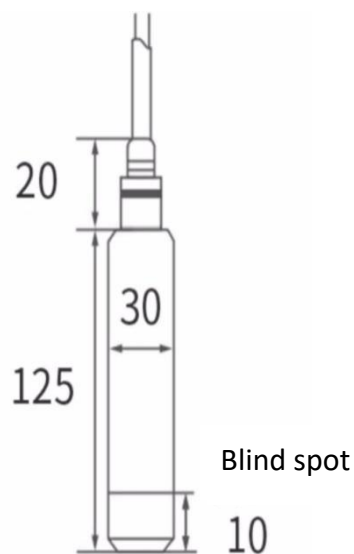

[Wiring Diagram]

Red	Blue	White	Black
V+	GND	D+	D-